



PREPARING FILES FOR PRINT

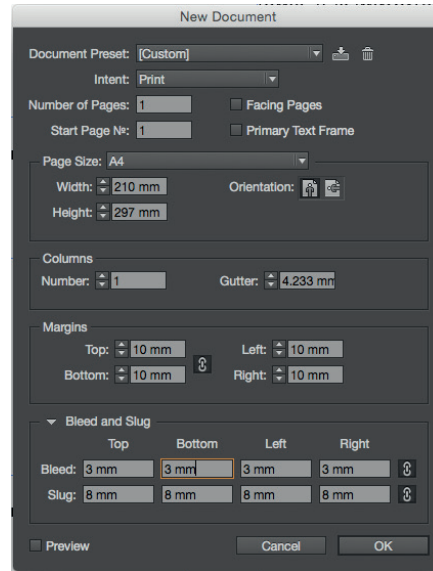

Setting up page

When you create your new document page, it is important to setup bleed and slug.

It will help you further with creating pdf for final output.

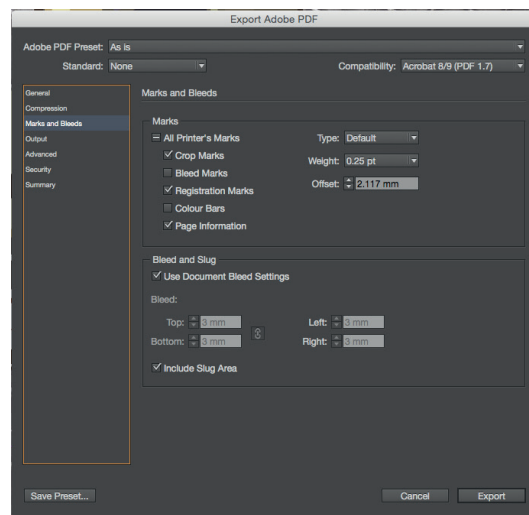


Exporting PDF

Tick Crop marks, Registration Marks, Bleed and Slug.

You can use Document Bleed Settings which you have set up creating your Document.

Optionally tick Page Info.

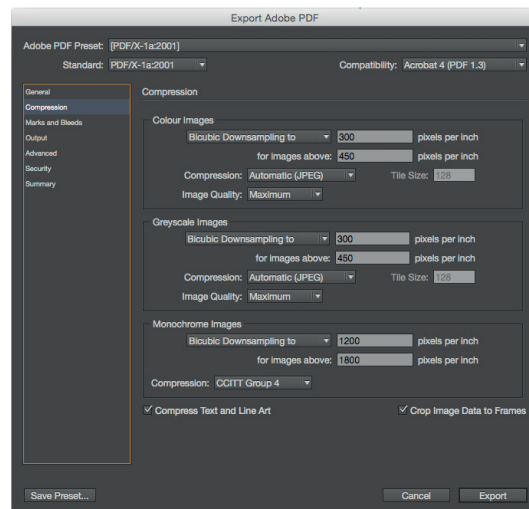

Setting up resolution


By default resolution should be 300 ppi for colour and greyscale images and 1200ppi for Monochrome.

Preparing files for print

For the quickest turn around and minimum problems, it is important that you supply your artwork to required specifications.

Files should be saved as:

- PDF X-1a:2001
- CMYK colour space for litho printing
- CMYK or RGB for digital printing
- 300 dpi resolution for raster images.




Bleed

When your document needs to be printed right to the edge of page, image has to be bigger than actual page (it has to bleed off the page). Usually it is 3mm around the page.



Slug

It is area around your document that can be used for additional information in your document which are not intended to print.



Cropmarks

We need to know how to trim your artwork, for this reason cropmarks must be included in supplied file.



Registration Marks

These marks are necessary to align the colours in your document, so registration marks are required.